

## DGO series - Large - Rubber hose



ID/OD (mm)

10 x 17

Length (m)

25

Coupler

ESI 07

Flow rate (l/min)

500

Swivel inlet (BSPP)

G 3/8 F

Weight (kg)

26

Technology

Pipe locked with ratchet stop

Max operating

pressure

12 bar

Construction

Epoxy-coated steel case

Connection


1 m of inlet supply hose

Equipped with

Fixed bracket

### Description

Reference	ID (in)	Length (ft)	Coupler	Flow rate (cfm)	Swivel inlet (BSPP)	Weight (lb)	ID/OD (mm)	Length (m)	Flow rate (l/min)	Weight (kg)
<b>DGO 1320IS</b>	1/2"	65'	ISI 08	35	1/2" MBSP	59.52	10 x 17	25	500	26
<b>DGO 1610IS</b>	5/8"	33'	ISI 11EB	106	1/2" MBSP	55.12	10 x 17	25	500	26
<b>DGO 1025US</b>	3/8"	82'	USI 06	18	3/8" FBSP	57.33				
<b>DGO 1025ES</b>	1/2"	65'	ESI 07	35	G 3/8 F	59.52				
<b>DGO 1320US</b>	5/8"	33'	USI 08	106	1/2" MBSP	55.12				
<b>DGO 1610US</b>	1/2"	65'	USI 11EB	35	1/2" MBSP	59.52				
<b>DGO 1025IS</b>	3/8"	25	ISI 06	500	G 3/8 F	26				
<b>DGO 1320ES</b>	1/2"	20	ESI 07	35	1/2" MBSP	59.52				
<b>DGO 1025CS</b>	5/8"	33'	CSI 06	106	G 3/8 FBSP	55.12				
<b>DGO 1320CS</b>			CSI 08		1/2" MBSP					
<b>DGO 1610ES</b>			ESI 11EB		1/2" MBSP					

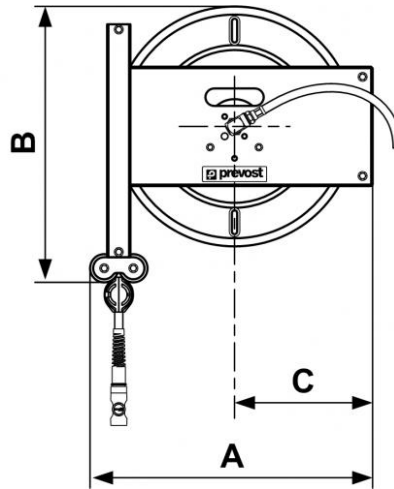

### Dimensions

Reference	A inch	B inch	C inch
<b>DGO 1320IS</b>	1.5912073490814	1.5583989501312	0.77755905511811
<b>DGO 1610IS</b>	1.5912073490814	1.5583989501312	0.77755905511811
<b>DGO 1025US</b>	1.5912073490814	1.5583989501312	0.77755905511811
<b>DGO 1025ES</b>	485	475	237
<b>DGO 1320US</b>	1.5912073490814	1.5583989501312	0.77755905511811
<b>DGO 1610US</b>	1.5912073490814	1.5583989501312	0.77755905511811
<b>DGO 1025IS</b>	485	475	237
<b>DGO 1320ES</b>	1.5912073490814	1.5583989501312	0.77755905511811
<b>DGO 1025CS</b>	1.5912073490814	1.5583989501312	0.77755905511811
<b>DGO 1320CS</b>	1.5912073490814	1.5583989501312	0.77755905511811
<b>DGO 1610ES</b>	1.5912073490814	1.5583989501312	0.77755905511811