

DMO series - Medium - Rubber hose



ID/OD (mm)

8 x 14

Length (m)

10

Coupler

ISI 06

Flow rate (l/min)

500

Swivel inlet (BSPP)

G 3/8 F

Weight (kg)

16

Technology

Pipe locked with ratchet stop

Max operating

pressure

12 bar

Construction

Epoxy-coated steel case

Connection

1 m of inlet supply hose

Equipped with


Fixed bracket

Description

| Reference | ID (in) | Length (ft) | Coupler | Flow rate (cfm) | Swivel inlet (BSPP) | Weight (lb) | ID/OD (mm) | Length (m) | Flow rate (l/min) | Weight (kg) |
|-------------------|---------|-------------|---------|-----------------|---------------------|-------------|------------|------------|-------------------|-------------|
| DMO 1010IS | 3/8" | 33' | ISI 06 | 29 | 3/8" FBSP | 37.48 | 8 x 14 | 10 | 500 | 16 |
| DMO 1015IS | 3/8" | 50' | ISI 06 | 25 | 3/8" FBSP | 41.89 | 10 x 17 | 20 | 660 | 22 |
| DMO 1020IS | 3/8" | 65' | ISI 06 | 23 | 3/8" FBSP | 48.50 | 8 x 14 | 10 | 500 | 16 |
| DMO 0810ES | 1/2" | 50' | ESI 07 | 49 | G 3/8 F | 48.50 | 8 x 14 | 15 | 350 | 17.5 |
| DMO 1315IS | 5/16" | 33' | ISI 08 | 18 | 1/2" MBSP | 35.28 | 8 x 14 | 20 | 260 | 19 |
| DMO 0810US | 5/16" | 50' | USI 06 | 12 | 3/8" FBSP | 38.58 | 8 x 14 | 20 | 260 | 19 |
| DMO 0815US | 5/16" | 65' | USI 06 | 9 | 3/8" FBSP | 41.89 | 10 x 17 | 20 | 660 | 22 |
| DMO 0820US | 3/8" | 33' | USI 06 | 29 | 3/8" FBSP | 37.48 | | | | |
| DMO 1010US | 3/8" | 50' | USI 06 | 25 | 3/8" FBSP | 41.89 | | | | |
| DMO 1015US | 3/8" | 65' | USI 06 | 23 | 3/8" FBSP | 48.50 | | | | |
| DMO 1020ES | 1/2" | 50' | ESI 07 | 49 | G 3/8 F | 48.50 | | | | |
| DMO 1020US | 5/16" | 50' | USI 06 | 12 | 3/8" FBSP | 38.58 | | | | |
| DMO 1315US | 5/16" | 65' | USI 08 | 9 | 1/2" MBSP | 41.89 | | | | |

| Reference | ID (in) | Length (ft) | Coupler | Flow rate (cfm) | Swivel inlet (BSPP) | Weight (lb) | ID/OD (mm) | Length (m) | Flow rate (l/min) | Weight (kg) |
|-------------------|---------|-------------|---------|-----------------|---------------------|-------------|------------|------------|-------------------|-------------|
| DMO 0810IS | 3/8" | 33' | ISI 06 | 32 | G 3/8 F | 37.48 | | | | |
| DMO 0815IS | 3/8" | 50' | ISI 06 | 25 | G 3/8 F | 41.89 | | | | |
| DMO 0820IS | 1/2" | 50' | ISI 06 | 49 | G 3/8 F | 48.50 | | | | |
| DMO 0815ES | - | 10 | ESI 07 | 500 | 3/8" FBSP | 16 | | | | |
| DMO 0820ES | 8 x 14 | 15 | ESI 07 | 12 | 3/8" FBSP | 17.5 | | | | |
| DMO 1010ES | - | 10 | ESI 07 | 29.41 | 3/8" FBSP | 17 | | | | |
| DMO 1015ES | - | 15 | ESI 07 | 700 | 3/8" FBSP | 19 | | | | |
| DMO 1315ES | 13 x 20 | 15 | ESI 07 | 1400 | 1/2" MBSP | 22 | | | | |
| DMO 0810CS | | | CSI 06 | | 3/8" FBSP | | | | | |
| DMO 0815CS | | | CSI 06 | | 3/8" FBSP | | | | | |
| DMO 0820CS | | | CSI 06 | | G 3/8 F | | | | | |
| DMO 1010CS | | | CSI 06 | | 3/8" FBSP | | | | | |
| DMO 1015CS | | | CSI 06 | | 3/8" FBSP | | | | | |

| Reference | ID (in) | Length (ft) | Coupler | Flow rate (cfm) | Swivel inlet (BSPP) | Weight (lb) | ID/OD (mm) | Length (m) | Flow rate (l/min) | Weight (kg) |
|-------------------|---------|-------------|---------|-----------------|---------------------|-------------|------------|------------|-------------------|-------------|
| DMO 1315CS | | | CSI 08 | | 1/2" MBSP | | | | | |
| DMO 1020CS | | | CSI 06 | | G 3/8 F | | | | | |

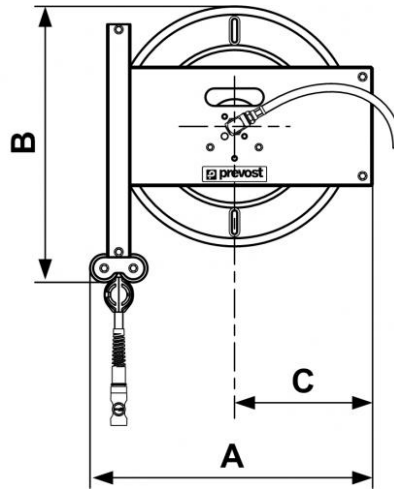

Dimensions

| Reference | A inch | B inch | C inch |
|-------------------|-----------------|-----------------|------------------|
| DMO 1010IS | 1.5912073490814 | 1.5583989501312 | 0.77755905511811 |
| DMO 1015IS | 1.5912073490814 | 1.5583989501312 | 0.77755905511811 |
| DMO 1020IS | 1.5912073490814 | 1.5583989501312 | 0.77755905511811 |
| DMO 0810ES | 485 | 475 | 237 |
| DMO 1315IS | 1.5912073490814 | 1.5583989501312 | 0.77755905511811 |
| DMO 0810US | 1.5912073490814 | 1.5583989501312 | 0.77755905511811 |
| DMO 0815US | 1.5912073490814 | 1.5583989501312 | 0.77755905511811 |
| DMO 0820US | 1.5912073490814 | 1.5583989501312 | 0.77755905511811 |
| DMO 1010US | 1.5912073490814 | 1.5583989501312 | 0.77755905511811 |
| DMO 1015US | 1.5912073490814 | 1.5583989501312 | 0.77755905511811 |
| DMO 1020ES | 485 | 475 | 237 |
| DMO 1020US | 1.5912073490814 | 1.5583989501312 | 0.77755905511811 |
| DMO 1315US | 1.5912073490814 | 1.5583989501312 | 0.77755905511811 |
| DMO 0810IS | 485 | 475 | 237 |

| Reference | A inch | B inch | C inch |
|-------------------|-----------------|-----------------|------------------|
| DMO 0815IS | 485 | 475 | 237 |
| DMO 0820IS | 485 | 475 | 237 |
| DMO 0815ES | 1.5912073490814 | 1.5583989501312 | 0.77755905511811 |
| DMO 0820ES | 1.5912073490814 | 1.5583989501312 | 0.77755905511811 |
| DMO 1010ES | 1.5912073490814 | 1.5583989501312 | 0.77755905511811 |
| DMO 1015ES | 1.5912073490814 | 1.5583989501312 | 0.77755905511811 |
| DMO 1315ES | 1.5912073490814 | 1.5583989501312 | 0.77755905511811 |
| DMO 0810CS | 1.5912073490814 | 1.5583989501312 | 0.77755905511811 |
| DMO 0815CS | 1.5912073490814 | 1.5583989501312 | 0.77755905511811 |
| DMO 0820CS | 485 | 475 | 237 |
| DMO 1010CS | 1.5912073490814 | 1.5583989501312 | 0.77755905511811 |
| DMO 1015CS | 1.5912073490814 | 1.5583989501312 | 0.77755905511811 |
| DMO 1315CS | 1.5912073490814 | 1.5583989501312 | 0.77755905511811 |
| DMO 1020CS | 485 | 475 | 237 |