

DMO series - Medium - Rubber hose



ID (in)

3/8"

Length (ft)

33'

Coupler

ISI 06

Flow rate (cfm)

29

Swivel inlet (BSPP)

3/8" FBSP

Weight (lb)

37.48

Technology

Pipe locked with ratchet stop

Max operating

pressure

174 psi

Construction

Epoxy-coated steel case

Connection

3.3 ft of inlet supply hose

Equipped with


Fixed bracket

Description

Reference	ID (in)	Length (ft)	Coupler	Flow rate (cfm)	Swivel inlet (BSPP)	Weight (lb)	ID/OD (mm)	Length (m)	Flow rate (l/min)	Weight (kg)
DMO 1010IS	3/8"	33'	ISI 06	29	3/8" FBSP	37.48	8 x 14	10	500	16
DMO 1015IS	3/8"	50'	ISI 06	25	3/8" FBSP	41.89	10 x 17	20	660	22
DMO 1020IS	3/8"	65'	ISI 06	23	3/8" FBSP	48.50	8 x 14	10	500	16
DMO 0810ES	1/2"	50'	ESI 07	49	G 3/8 F	48.50	8 x 14	15	350	17.5
DMO 1315IS	5/16"	33'	ISI 08	18	1/2" MBSP	35.28	8 x 14	20	260	19
DMO 0810US	5/16"	50'	USI 06	12	3/8" FBSP	38.58	8 x 14	20	260	19
DMO 0815US	5/16"	65'	USI 06	9	3/8" FBSP	41.89	10 x 17	20	660	22
DMO 0820US	3/8"	33'	USI 06	29	3/8" FBSP	37.48				
DMO 1010US	3/8"	50'	USI 06	25	3/8" FBSP	41.89				
DMO 1015US	3/8"	65'	USI 06	23	3/8" FBSP	48.50				
DMO 1020ES	1/2"	50'	ESI 07	49	G 3/8 F	48.50				
DMO 1020US	5/16"	50'	USI 06	12	3/8" FBSP	38.58				
DMO 1315US	5/16"	65'	USI 08	9	1/2" MBSP	41.89				

Reference	ID (in)	Length (ft)	Coupler	Flow rate (cfm)	Swivel inlet (BSPF)	Weight (lb)	ID/OD (mm)	Length (m)	Flow rate (l/min)	Weight (kg)
DMO 0810IS	3/8"	33'	ISI 06	32	G 3/8 F	37.48				
DMO 0815IS	3/8"	50'	ISI 06	25	G 3/8 F	41.89				
DMO 0820IS	1/2"	50'	ISI 06	49	G 3/8 F	48.50				
DMO 0815ES	-	10	ESI 07	500	3/8" FBSP	16				
DMO 0820ES	8 x 14	15	ESI 07	12	3/8" FBSP	17.5				
DMO 1010ES	-	10	ESI 07	29.41	3/8" FBSP	17				
DMO 1015ES	-	15	ESI 07	700	3/8" FBSP	19				
DMO 1315ES	13 x 20	15	ESI 07	1400	1/2" MBSP	22				
DMO 0810CS			CSI 06		3/8" FBSP					
DMO 0815CS			CSI 06		3/8" FBSP					
DMO 0820CS			CSI 06		G 3/8 F					
DMO 1010CS			CSI 06		3/8" FBSP					
DMO 1015CS			CSI 06		3/8" FBSP					

Reference	ID (in)	Length (ft)	Coupler	Flow rate (cfm)	Swivel inlet (BSPP)	Weight (lb)	ID/OD (mm)	Length (m)	Flow rate (l/min)	Weight (kg)
DMO 1315CS			CSI 08		1/2" MBSP					
DMO 1020CS			CSI 06		G 3/8 F					

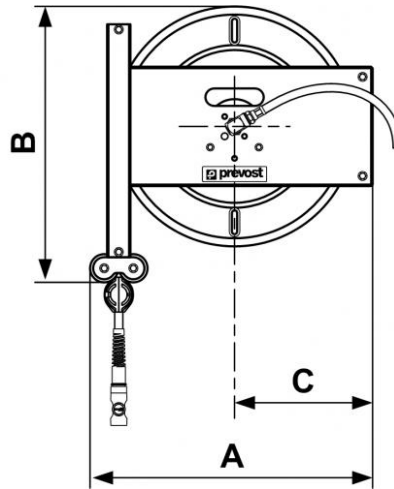

Dimensions

Reference	A inch	B inch	C inch
DMO 1010IS	1.5912073490814	1.5583989501312	0.77755905511811
DMO 1015IS	1.5912073490814	1.5583989501312	0.77755905511811
DMO 1020IS	1.5912073490814	1.5583989501312	0.77755905511811
DMO 0810ES	485	475	237
DMO 1315IS	1.5912073490814	1.5583989501312	0.77755905511811
DMO 0810US	1.5912073490814	1.5583989501312	0.77755905511811
DMO 0815US	1.5912073490814	1.5583989501312	0.77755905511811
DMO 0820US	1.5912073490814	1.5583989501312	0.77755905511811
DMO 1010US	1.5912073490814	1.5583989501312	0.77755905511811
DMO 1015US	1.5912073490814	1.5583989501312	0.77755905511811
DMO 1020ES	485	475	237
DMO 1020US	1.5912073490814	1.5583989501312	0.77755905511811
DMO 1315US	1.5912073490814	1.5583989501312	0.77755905511811
DMO 0810IS	485	475	237

Reference	A inch	B inch	C inch
DMO 0815IS	485	475	237
DMO 0820IS	485	475	237
DMO 0815ES	1.5912073490814	1.5583989501312	0.77755905511811
DMO 0820ES	1.5912073490814	1.5583989501312	0.77755905511811
DMO 1010ES	1.5912073490814	1.5583989501312	0.77755905511811
DMO 1015ES	1.5912073490814	1.5583989501312	0.77755905511811
DMO 1315ES	1.5912073490814	1.5583989501312	0.77755905511811
DMO 0810CS	1.5912073490814	1.5583989501312	0.77755905511811
DMO 0815CS	1.5912073490814	1.5583989501312	0.77755905511811
DMO 0820CS	485	475	237
DMO 1010CS	1.5912073490814	1.5583989501312	0.77755905511811
DMO 1015CS	1.5912073490814	1.5583989501312	0.77755905511811
DMO 1315CS	1.5912073490814	1.5583989501312	0.77755905511811
DMO 1020CS	485	475	237