


Electric drain valve w/ float and pilot valve



<u>Outlet Ø</u> -	<u>Removal capacity (gal/h)</u> -	<u>Operating pressure (psi)</u> -	<u>Protection rating</u> -
<u>Supply voltage (V)</u> -	<u>Temperature</u> -	<u>Description</u> Repair kit for PDE 100 automatic drain	<u>Operating pressure</u> 0 to 232 psi
<u>ID Passage</u> 5/32"	<u>Temperature</u> +35°F to +131°F	<u>Drain cycle</u> 0,5 - 45 min	<u>Drain opening</u> 0,5 - 10 sec
<u>Supply voltage</u> 24 - 220 V 50/60 HZ			

Description

Reference	Outlet Ø	Removal capacity (gal/h)	Operating pressure (psi)	Protection rating	Supply voltage (V)	Temperature	Description
PDE 100KR	-	-	-	-	-	-	Repair kit for PDE 100 automatic drain

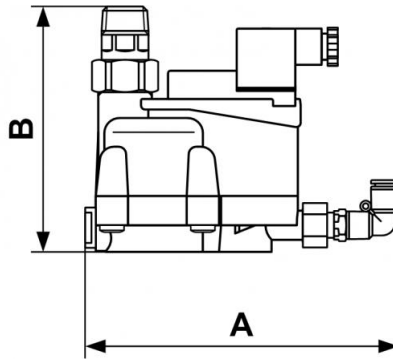

Dimensions

Reference

PDE 100KR