

Cyclone water separator with float drain



Female thread (BSPP)

G 3/4

Flow rate (m3/h)

235

Max operating pressure

16 bar

Temperature

+1°C to +65°C

Construction

Anodised Aluminium


Equipped with

Automatic float drain

Description

| Reference | Female thread (BSPP) | Flow rate (m3/h) | Female thread (NPT) | Flow rate (cfm) |
|-----------|----------------------|------------------|---------------------|-----------------|
|-----------|----------------------|------------------|---------------------|-----------------|

| | | | | |
|------------------|-------|-----|-------------|-----|
| SPC 235 | G 3/4 | 235 | 1/2" FNPT | 91 |
| SPC 155T | | | 3/4" FNPT | 138 |
| SPC 235T | | | 1" FNPT | 215 |
| SPC 365T | | | 1" 1/2 FNPT | 452 |
| SPC 770T | | | 2" FNPT | 753 |
| SPC 1280T | | | | |

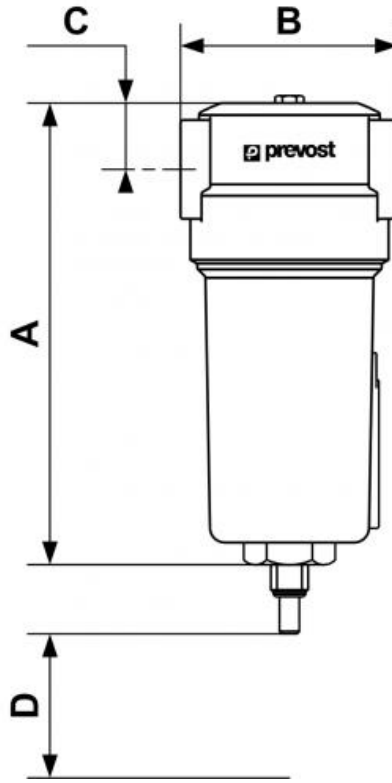

Dimensions

| Reference | A inch | B inch | C inch | D inch |
|------------------|------------------|------------------|-------------------|------------------|
| SPC 235 | 257 | 88 | 20 | 80 |
| SPC 155T | 0.61351706036745 | 0.28871391076115 | 0.065616797900262 | 0.19685039370079 |
| SPC 235T | 0.84317585301837 | 0.28871391076115 | 0.065616797900262 | 0.26246719160105 |
| SPC 365T | 0.86286089238845 | 0.41010498687664 | 0.10498687664042 | 0.32808398950131 |
| SPC 770T | 1.512467191601 | 0.41010498687664 | 0.10498687664042 | 0.45931758530184 |
| SPC 1280T | 2.244094488189 | 0.53477690288714 | 0.14107611548556 | 1.7060367454068 |