

Cyclonic Water Separator w/ Float Drain



Female thread (NPT)

1/2" FNPT

Flow rate (cfm)

91

Max operating pressure

232 psi

Temperature

+34°F to +149°F

Construction

Anodized Aluminium


Equipped with

Automatic float drain

Description

Reference	Female thread (BSPP)	Flow rate (m3/h)	Female thread (NPT)	Flow rate (cfm)
-----------	----------------------	------------------	---------------------	-----------------

SPC 235	G 3/4	235	1/2" FNPT	91
SPC 155T			3/4" FNPT	138
SPC 235T			1" FNPT	215
SPC 365T			1" 1/2 FNPT	452
SPC 770T			2" FNPT	753
SPC 1280T				

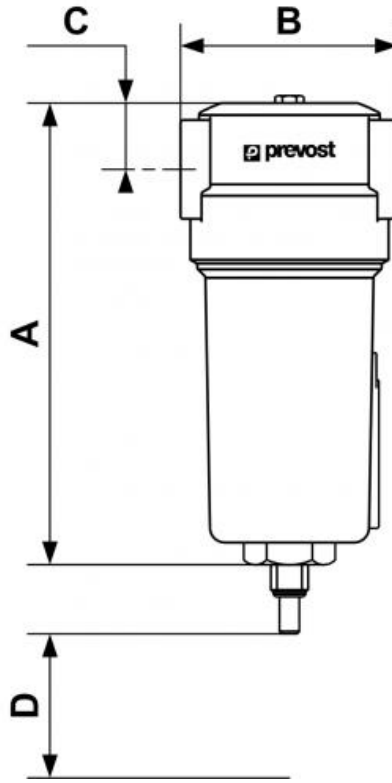

Dimensions

Reference	A inch	B inch	C inch	D inch
SPC 235	257	88	20	80
SPC 155T	0.61351706036745	0.28871391076115	0.065616797900262	0.19685039370079
SPC 235T	0.84317585301837	0.28871391076115	0.065616797900262	0.26246719160105
SPC 365T	0.86286089238845	0.41010498687664	0.10498687664042	0.32808398950131
SPC 770T	1.512467191601	0.41010498687664	0.10498687664042	0.45931758530184
SPC 1280T	2.244094488189	0.53477690288714	0.14107611548556	1.7060367454068