


Spraygun for cleaning



| | | | |
|---|--|---|--|
| <p><u>Inlet BSPP female thread</u> G 1/4</p> | <p><u>Capacity (l)</u> 1.2</p> | <p><u>Flow rate (at 8 bar (l/min))</u> 100</p> | <p><u>Construction (Tank)</u> high density polyethylene</p> |
| <p><u>Operating pressure</u> 6 to 12 bar</p> | <p><u>Temperature</u> -10°C to + 80°C</p> | <p><u>Construction</u> Acetal plastic body</p> | <p><u>Applications</u> Stripping - cleaning Automotive sector, industry</p> |

| Description | | | | | | | | |
|-------------------|--------------------------|--------------|------------------------------|---------------------------|-------------------------|---------------|-----------------------------|---------------------------|
| Reference | Inlet BSPP female thread | Capacity (l) | Flow rate (at 8 bar (l/min)) | Construction (Tank) | Inlet NPT female thread | Capacity (oz) | Flow rate (at 87 psi (cfm)) | Construction |
| BG SPRAY1 | G 1/4 | 1.2 | 100 | high density polyethylene | 1/4" FNPT | 40 | 16 | High density polyethylene |
| BG SPRAY1T | | | | | | | | |

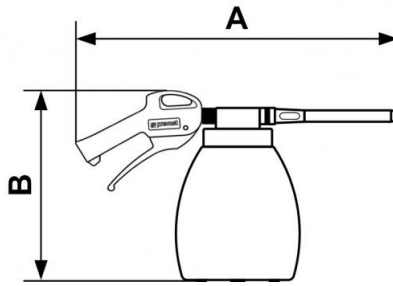

Dimensions

| Reference | A inch | B inch |
|-------------------|-----------------|------------------|
| BG SPRAY1 | 350 | 200 |
| BG SPRAY1T | 1.1482939632546 | 0.65616797900263 |