

## Threaded swivel coupler



**NPT female thread**

3/8" FNPT

**Technology**

"One push" safety system  
(avoids hose whip)

**Operating pressure**

29 to 174 psi

**Flow rate at 100 psi**

34 cfm ( $\Delta P = 10$  psi)

**ID Passage**

1/4" body size

**Temperature**

+5°F to +158°F

**Construction**

Composite body

**Highlight**

Anti-static Non scratch

### Description

Reference


NPT female thread

**CSI 061202SW**

3/8" FNPT

**CSI 061201SW**

1/4" FNPT

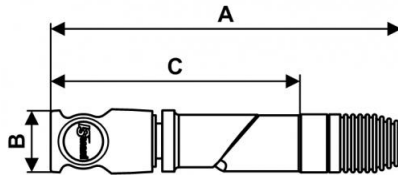

### Dimensions

Reference	A inch	B inch	C inch
<b>CSI 061202SW</b>	0.51837270341207	0.088582677165354	0.36745406824147
<b>CSI 061201SW</b>	0.51837270341207	0.088582677165354	0.36745406824147