

## Female coupler



**NPT female thread**

3/8" FNPT

**Technology**

"One push" safety system  
(avoids hose whip)

**Operating pressure**

29 to 174 psi

**Flow rate at 100 psi**

148 cfm ( $\Delta P = 8.70$  psi)

**ID Passage**

1/2" body size

**Temperature**

+5°F to +158°F

**Construction**


Polyamide composite body

**Highlight**

Anti-static Excellent  
efficiency Non scratch

### Description

| Reference           | NPT female thread |
|---------------------|-------------------|
| <b>ISI 111202EB</b> | 3/8" FNPT         |
| <b>ISI 111203EB</b> | 1/2" FNPT         |
| <b>ISI 111204EB</b> | 3/4" FNPT         |

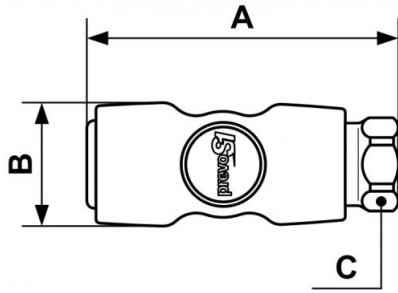

### Dimensions

| Reference           | A inch           | B inch           | C inch            |
|---------------------|------------------|------------------|-------------------|
| <b>ISI 111202EB</b> | 0.3248031496063  | 0.12139107611549 | 0.085301837270341 |
| <b>ISI 111203EB</b> | 0.33136482939633 | 0.12139107611549 | 0.085301837270341 |
| <b>ISI 111204EB</b> | 0.35433070866142 | 0.12139107611549 | 0.098425196850394 |