

## Female coupler



### BSPP female thread

3/4" FBSP

### Profile

Automotive Interchange

### Technology

"One push" safety system  
(avoids hose whip)

### Operating pressure

29 to 174 psi

### Flow rate at 100 psi

120 cfm ( $\Delta P$  : 10 psi)

### ID Passage

1/2" body size

### Temperature

+5°F to +158°F


### Construction

Polyamide composite body

### Highlight

Anti-static Excellent  
efficiency Non scratch

| Description         |                    |                   |
|---------------------|--------------------|-------------------|
| Reference           | BSPF female thread | NPT female thread |
| <b>USI 111104EB</b> | 3/4" FBSP          | 3/8" FNPT         |
| <b>USI 111103EB</b> | 1/2" FBSP          | 1/2" FNPT         |
| <b>USI 111202EB</b> |                    | 3/4" FNPT         |
| <b>USI 111203EB</b> |                    |                   |
| <b>USI 111204EB</b> |                    |                   |

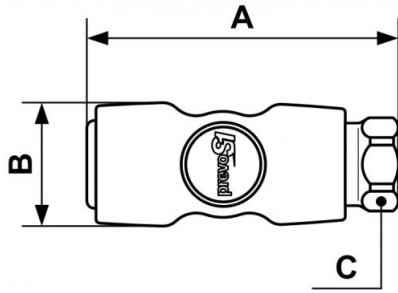

### Dimensions

| Reference           | A inch           | B inch           | C inch            |
|---------------------|------------------|------------------|-------------------|
| <b>USI 111104EB</b> | 111              | 37               | 30                |
| <b>USI 111103EB</b> | 103              | 37               | 26                |
| <b>USI 111202EB</b> | 0.32808398950131 | 0.12139107611549 | 0.085301837270341 |
| <b>USI 111203EB</b> | 0.33464566929134 | 0.12139107611549 | 0.085301837270341 |
| <b>USI 111204EB</b> | 0.35433070866142 | 0.12139107611549 | 0.098425196850394 |