

## Male coupler



### BSPB male thread

3/4" MBSP

### Profile

Automotive Interchange

### Technology

"One push" safety system  
(avoids hose whip)

### Operating pressure

29 to 174 psi

### Flow rate at 100 psi

120 cfm ( $\Delta P$  : 10 psi)

### ID Passage

1/2" body size

### Temperature

+5°F to +158°F


### Construction

Polyamide composite body

### Highlight

Anti-static Excellent  
efficiency Non scratch

Description		
Reference	BSP male thread	NPT male thread
<b>USI 111154EB</b>	3/4" MBSP	3/8" MNPT
<b>USI 111153EB</b>	1/2" MBSP	1/2" MNPT
<b>USI 111152EB</b>	3/8" MBSP	3/4" MNPT
<b>USI 111252EB</b>		
<b>USI 111253EB</b>		
<b>USI 111254EB</b>		

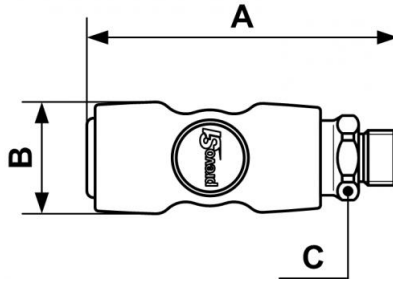

### Dimensions

Reference	A inch	B inch	C inch
<b>USI 111154EB</b>	115	37	32
<b>USI 111153EB</b>	110	37	26
<b>USI 111152EB</b>	108	37	26
<b>USI 111252EB</b>	0.36745406824147	0.12139107611549	0.085301837270341
<b>USI 111253EB</b>	0.38057742782152	0.12139107611549	0.085301837270341
<b>USI 111254EB</b>	0.38713910761155	0.12139107611549	0.098425196850394