

Male coupler



NPT male thread

3/8" MNPT

Profile

Automotive Interchange

Technology

"One push" safety system
(avoids hose whip)

Operating pressure

29 to 174 psi

Flow rate at 100 psi

120 cfm ($\Delta P = 10$ psi)

ID Passage

1/2" body size

Temperature

+5°F to +158°F


Construction

Polyamide composite body

Highlight

Anti-static Excellent
efficiency Non scratch

Description		
Reference	BSP male thread	NPT male thread
USI 111154EB	3/4" MBSP	3/8" MNPT
USI 111153EB	1/2" MBSP	1/2" MNPT
USI 111152EB	3/8" MBSP	3/4" MNPT
USI 111252EB		
USI 111253EB		
USI 111254EB		

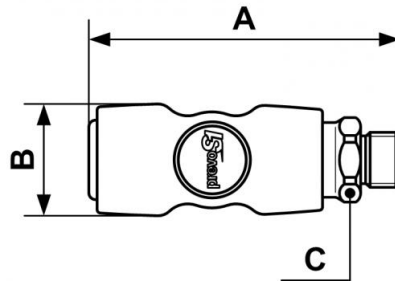

Dimensions

Reference	A inch	B inch	C inch
USI 111154EB	115	37	32
USI 111153EB	110	37	26
USI 111152EB	108	37	26
USI 111252EB	0.36745406824147	0.12139107611549	0.085301837270341
USI 111253EB	0.38057742782152	0.12139107611549	0.085301837270341
USI 111254EB	0.38713910761155	0.12139107611549	0.098425196850394