


## Sandblaster



|  |  |   |  |
|--|--|---|--|
| <p><b><u>Inlet NPT female thread</u></b><br/>1/4" FNPT</p> | <p><b><u>Capacity (Oz)</u></b><br/>40</p>            | <p><b><u>Flow rate (at 87 psi (cfm))</u></b><br/>3.5</p>  | <p><b><u>Construction</u></b><br/>High density polyethylene</p>                            |
| <p><b><u>Operating pressure</u></b><br/>87 to 174 psi</p>  | <p><b><u>Temperature</u></b><br/>+14°F to +176°F</p> | <p><b><u>Construction</u></b><br/>Acetal plastic body</p> | <p><b><u>Applications</u></b><br/>Stripping - cleaning<br/>Automotive sector, industry</p> |

| Description      |                         |               |                             |                           |
|------------------|-------------------------|---------------|-----------------------------|---------------------------|
| Reference        | Inlet NPT female thread | Capacity (Oz) | Flow rate (at 87 psi (cfm)) | Construction              |
| <b>BG SAND1T</b> | 1/4" FNPT               | 40            | 3.5                         | High density polyethylene |

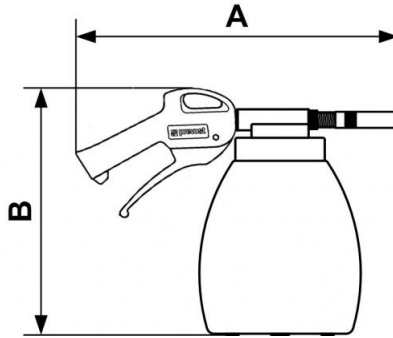

### Dimensions

| Reference        | A inch           | B inch           |
|------------------|------------------|------------------|
| <b>BG SAND1T</b> | 0.85301837270341 | 0.65616797900263 |