


Sandblaster



| | | | |
|--|--|---|--|
| <p><u>Inlet NPT female thread</u> 1/4" FNPT</p> | <p><u>Capacity (Oz)</u> 40</p> | <p><u>Flow rate (at 87 psi (cfm))</u> 3.5</p> | <p><u>Construction</u> High density polyethylene</p> |
| <p><u>Operating pressure</u> 87 to 174 psi</p> | <p><u>Temperature</u> +14°F to +176°F</p> | <p><u>Construction</u> Acetal plastic body</p> | <p><u>Applications</u> Stripping - cleaning Automotive sector, industry</p> |

| Description | | | | |
|------------------|-------------------------|---------------|-----------------------------|---------------------------|
| Reference | Inlet NPT female thread | Capacity (Oz) | Flow rate (at 87 psi (cfm)) | Construction |
| BG SAND1T | 1/4" FNPT | 40 | 3.5 | High density polyethylene |

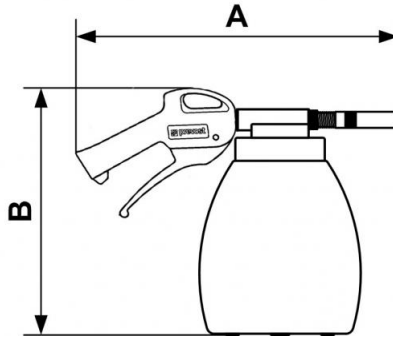

Dimensions

| Reference | A inch | B inch |
|------------------|------------------|------------------|
| BG SAND1T | 0.85301837270341 | 0.65616797900263 |