


Spraygun for cleaning



| | | | |
|--|--|---|---|
| <u>Inlet NPT female thread</u> 1/4" FNPT | <u>Capacity (oz)</u> 40 | <u>Flow rate (at 87 psi (cfm))</u> 16 | <u>Construction</u> High density polyethylene |
| <u>Operating pressure</u> 87 to 174 psi | <u>Temperature</u> +14°F to +176°F | <u>Construction</u> Acetal plastic body | <u>Applications</u> Stripping - cleaning Automotive sector, industry |

| Description | | | | | | | | |
|-------------------|--------------------------|--------------|------------------------------|---------------------------|-------------------------|---------------|-----------------------------|---------------------------|
| Reference | Inlet BSPB female thread | Capacity (l) | Flow rate (at 8 bar (l/min)) | Construction (Tank) | Inlet NPT female thread | Capacity (oz) | Flow rate (at 87 psi (cfm)) | Construction |
| BG SPRAY1 | G 1/4 | 1.2 | 100 | high density polyethylene | 1/4" FNPT | 40 | 16 | High density polyethylene |
| BG SPRAY1T | | | | | | | | |

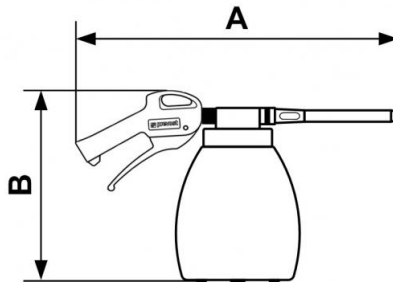

Dimensions

| Reference | A inch | B inch |
|-------------------|-----------------|------------------|
| BG SPRAY1 | 350 | 200 |
| BG SPRAY1T | 1.1482939632546 | 0.65616797900263 |