


PPS1 BFV - Tapping flange BFT with valve

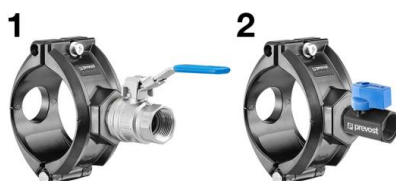

For pipe OD

(2) 1"

NPT female thread

1/2" FNPT

Technology

PPS Grip Concept

Operating pressure

0 to 232 psi

Vacuum capability

-29 inHg (vacuum 98%)

Temperature

-4°F to +176°F

Construction

Pipe and fittings: aluminum

Highlight

Scalable system


Meets standards

ASME B31.3 REACH

Description

Reference	For pipe OD	NPT female thread
PPS1 BFV25203	(2) 1"	1/2" FNPT
PPS1 BFV32203	(2) 1 1/4"	1/2" FNPT
PPS1 BFV40203	(2) 1 1/2"	1/2" FNPT
PPS1 BFV40205	(1) 1 1/2"	1" FNPT
PPS1 BFV50203	(2) 2"	1/2" FNPT
PPS1 BFV50205	(1) 2"	1" FNPT

Reference	For pipe OD	NPT female thread
PPS1 BFV63203	(2) 2 1/2"	1/2" FNPT
PPS1 BFV63205	(1) 2 1/2"	(1) 1" FNPT
PPS1 BFV80203	(2) 3"	1/2" FNPT
PPS1 BFV80205	(1) 3"	1" FNPT
PPS1 BFV100203	(2) 4"	1/2" FNPT
PPS1 BFV100205	(1) 4"	1" FNPT

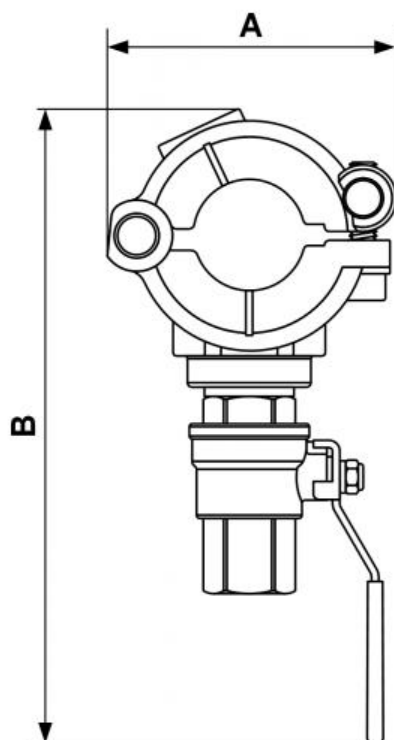

Dimensions		
Reference	A inch	B inch
PPS1 BFV25203	2.56	5.709
PPS1 BFV32203	2.56	5.709
PPS1 BFV40203	3.701	6.693
PPS1 BFV40205	3.701	8.268
PPS1 BFV50203	3.701	6.693
PPS1 BFV50205	3.701	8.268
PPS1 BFV63203	5.394	8.268
PPS1 BFV63205	5.394	9.646
PPS1 BFV80203	5.394	8.268
PPS1 BFV80205	5.394	9.646

Reference	A inch	B inch
PPS1 BFV100203	6.26	8.858
PPS1 BFV100205	6.26	8.858