


## 304 Stainless steel with rubber hose - Food grade



|   |   |   |  |
|---|---|---|--|
| <p><b><u>ID (in)</u></b><br/>5/8"</p>                               | <p><b><u>Length (ft)</u></b><br/>82'</p>                          | <p><b><u>Coupler</u></b><br/>ELS 09</p>                 | <p><b><u>Swivel inlet BSPP male thread</u></b><br/>1/2" MBSP</p> |
| <p><b><u>Weight (lbs)</u></b><br/>97</p>                            | <p><b><u>Technology</u></b><br/>Pipe locked with ratchet stop</p> | <p><b><u>Max operating pressure</u></b><br/>145 psi</p> | <p><b><u>Temperature</u></b><br/>+5°F to +140°F</p>              |
| <p><b><u>Construction</u></b><br/>AISI 304 stainless steel case</p> | <p><b><u>Connection</u></b><br/>3.3 ft of inlet supply hose</p>   | <p><b><u>Equipped with</u></b><br/>Fixed bracket</p>    |  |

### Description

| Reference          | ID (in) | Length (ft) | Coupler | Swivel inlet BSP male thread | Weight (lbs) | ID/OD (mm) | Length (m) | Weight (kg) |
|--------------------|---------|-------------|---------|------------------------------|--------------|------------|------------|-------------|
| <b>DLOI 1625LS</b> | 5/8"    | 82'         | ELS 09  | 1/2" MBSP                    | 97           | 19 x 28    | 20         | 42          |
| <b>DLOI 1920LS</b> |         |             | ELS 09  | G 1                          |              |            |            |             |

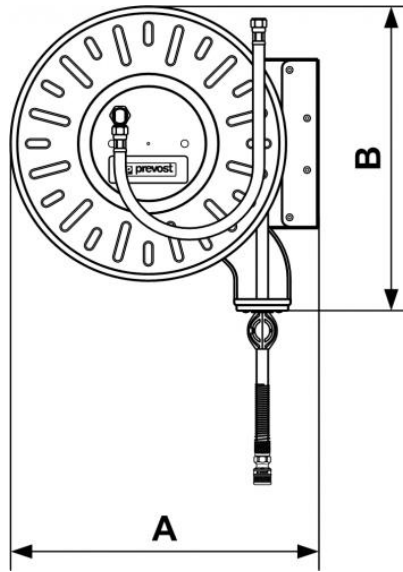

### Dimensions

| Reference          | A inch          | B inch         |
|--------------------|-----------------|----------------|
| <b>DLOI 1625LS</b> | 2.0472440944882 | 2.001312335958 |
| <b>DLOI 1920LS</b> | 624             | 610            |