


304 Stainless steel with rubber hose - Food grade



<p><u>ID (in)</u> 5/8"</p>	<p><u>Length (ft)</u> 82'</p>	<p><u>Coupler</u> ELS 09</p>	<p><u>Swivel inlet BSPP male thread</u> 1/2" MBSP</p>
<p><u>Weight (lbs)</u> 97</p>	<p><u>Technology</u> Pipe locked with ratchet stop</p>	<p><u>Max operating pressure</u> 145 psi</p>	<p><u>Temperature</u> +5°F to +140°F</p>
<p><u>Construction</u> AISI 304 stainless steel case</p>	<p><u>Connection</u> 3.3 ft of inlet supply hose</p>	<p><u>Equipped with</u> Fixed bracket</p>	

Description

Reference	ID (in)	Length (ft)	Coupler	Swivel inlet BSP male thread	Weight (lbs)	ID/OD (mm)	Length (m)	Weight (kg)
DLOI 1625LS	5/8"	82'	ELS 09	1/2" MBSP	97	19 x 28	20	42
DLOI 1920LS			ELS 09	G 1				

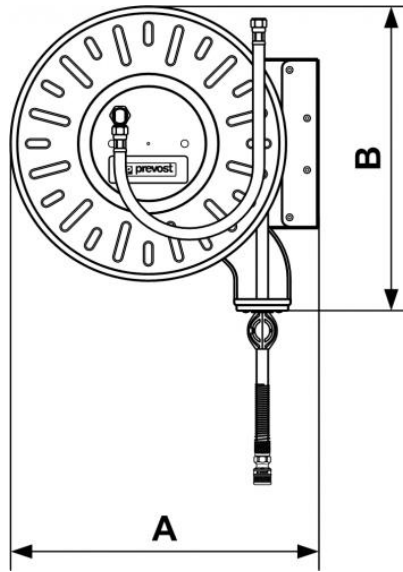

Dimensions		
Reference	A inch	B inch
DLOI 1625LS	2.0472440944882	2.001312335958
DLOI 1920LS	624	610