


## 304 Stainless steel with rubber hose - Food grade



<p><b><u>ID (in)</u></b> 5/8"</p>	<p><b><u>Length (ft)</u></b> 82'</p>	<p><b><u>Coupler</u></b> ELS 09</p>	<p><b><u>Swivel inlet BSPP male thread</u></b> 1/2" MBSP</p>
<p><b><u>Weight (lbs)</u></b> 97</p>	<p><b><u>Technology</u></b> Pipe locked with ratchet stop</p>	<p><b><u>Max operating pressure</u></b> 145 psi</p>	<p><b><u>Temperature</u></b> +5°F to +140°F</p>
<p><b><u>Construction</u></b> AISI 304 stainless steel case</p>	<p><b><u>Connection</u></b> 3.3 ft of inlet supply hose</p>	<p><b><u>Equipped with</u></b> Fixed bracket</p>	

### Description

Reference	ID (in)	Length (ft)	Coupler	Swivel inlet BSP male thread	Weight (lbs)	ID/OD (mm)	Length (m)	Weight (kg)
<b>DLOI 1625LS</b>	5/8"	82'	ELS 09	1/2" MBSP	97	19 x 28	20	42
<b>DLOI 1920LS</b>			ELS 09	G 1				

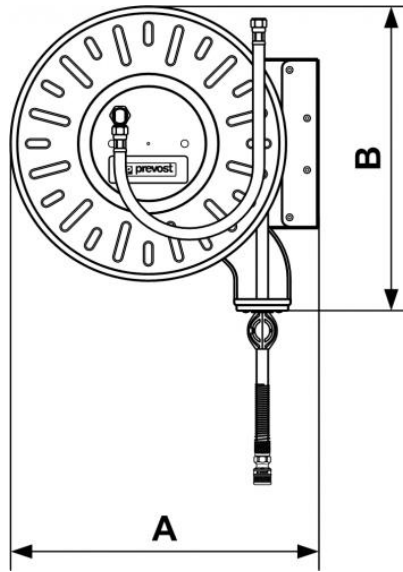

### Dimensions

Reference	A inch	B inch
<b>DLOI 1625LS</b>	2.0472440944882	2.001312335958
<b>DLOI 1920LS</b>	624	610