


Polyurethane recoils with rigid and swiveling male fittings

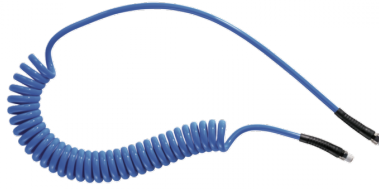

Blue.

Teflon-coated coupler.

<u>BSPT male thread</u> R 1/4	<u>ID/OD (mm)</u> 5 x 8	<u>Coil Ø (mm)</u> 42	<u>Max length (m)</u> 4
<u>Min. length (m)</u> 0.4	<u>Max operating pressure</u> 8 bar	<u>Temperature</u> -15°C to +70°C	<u>Construction</u> Polyurethane
<u>Highlight</u> Non scratch			

Description										
Reference	BSPT male thread	ID/OD (mm)	Coil Ø (mm)	Max length (m)	Min. length (m)	NPT male thread	ID (in)	Coil Ø (in)	Max length (ft)	Min. length (ft)
PUS 54	R 1/4	5 x 8	42	4	0.4	1/4" MNPT	1/4"	1.65"	6.5'	0.60'
PUS 66	R 1/4	6.5 x 10	52	6	0.55	1/4" MNPT	1/4"	1.65"	13'	1.31'

Reference	BSPT male thread	ID/OD (mm)	Coil Ø (mm)	Max length (m)	Min. length (m)	NPT male thread	ID (in)	Coil Ø (in)	Max length (ft)	Min. length (ft)
PUS 86	R 3/8	8 x 12	65	6	0.65	1/4" MNPT	5/16"	2.05"	13'	1.31'
PUS 252						1/4" MNPT	5/16"	2.05"	20'	2.07'
PUS 254						1/4" MNPT	5/16"	2.05"	26'	2.62'
PUS 264						1/4" MNPT	5/16"	2.05"	32'	3.12'
PUS 266						3/8" MNPT	3/8"	2.56"	26'	2.36'
PUS 268						3/8" MNPT	3/8"	2.56"	50'	4.43'
PUS 2610										
PUS 288										
PUS 2815										

