


Polyurethane recoils with rigid and swiveling male fittings

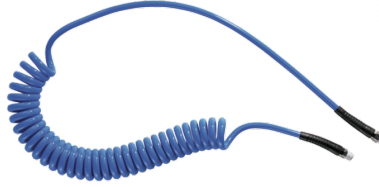

Blue.

Teflon-coated coupler.

| | | | |
|---|---|---|--|
| <u>BSPT male thread</u> R 1/4 | <u>ID/OD (mm)</u> 5 x 8 | <u>Coil Ø (mm)</u> 42 | <u>Max length (m)</u> 4 |
| <u>Min. length (m)</u> 0.4 | <u>Max operating pressure</u> 8 bar | <u>Temperature</u> -15°C to +70°C | <u>Construction</u> Polyurethane |
| <u>Highlight</u> Non scratch | | | |

| Description | | | | | | | | | | |
|---------------|------------------|------------|-------------|----------------|-----------------|-----------------|---------|-------------|-----------------|------------------|
| Reference | BSPT male thread | ID/OD (mm) | Coil Ø (mm) | Max length (m) | Min. length (m) | NPT male thread | ID (in) | Coil Ø (in) | Max length (ft) | Min. length (ft) |
| PUS 54 | R 1/4 | 5 x 8 | 42 | 4 | 0.4 | 1/4" MNPT | 1/4" | 1.65" | 6.5' | 0.60' |
| PUS 66 | R 1/4 | 6.5 x 10 | 52 | 6 | 0.55 | 1/4" MNPT | 1/4" | 1.65" | 13' | 1.31' |

| Reference | BSPT male thread | ID/OD (mm) | Coil Ø (mm) | Max length (m) | Min. length (m) | NPT male thread | ID (in) | Coil Ø (in) | Max length (ft) | Min. length (ft) |
|-----------|------------------|------------|-------------|----------------|-----------------|-----------------|---------|-------------|-----------------|------------------|
| PUS 86 | R 3/8 | 8 x 12 | 65 | 6 | 0.65 | 1/4" MNPT | 5/16" | 2.05" | 13' | 1.31' |
| PUS 252 | | | | | | 1/4" MNPT | 5/16" | 2.05" | 20' | 2.07' |
| PUS 254 | | | | | | 1/4" MNPT | 5/16" | 2.05" | 26' | 2.62' |
| PUS 264 | | | | | | 1/4" MNPT | 5/16" | 2.05" | 32' | 3.12' |
| PUS 266 | | | | | | 3/8" MNPT | 3/8" | 2.56" | 26' | 2.36' |
| PUS 268 | | | | | | 3/8" MNPT | 3/8" | 2.56" | 50' | 4.43' |
| PUS 2610 | | | | | | | | | | |
| PUS 288 | | | | | | | | | | |
| PUS 2815 | | | | | | | | | | |

