


## Polyurethane recoils with rigid and swiveling male fittings

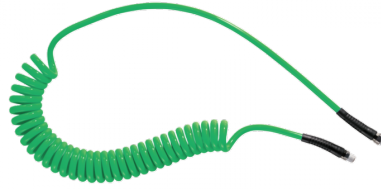

Green.

Teflon-coated coupler.

<b><u>BSPT male thread</u></b> R 1/4	<b><u>ID/OD (mm)</u></b> 6.5 x 10	<b><u>Coil Ø (mm)</u></b> 42	<b><u>Max length (m)</u></b> 4
<b><u>Min. length (m)</u></b> 0.4	<b><u>Max operating pressure</u></b> 8 bar	<b><u>Temperature</u></b> -15°C to +70°C	<b><u>Construction</u></b> Polyurethane
<b><u>Highlight</u></b> Non scratch			

Description										
Reference	BSPT male thread	ID/OD (mm)	Coil Ø (mm)	Max length (m)	Min. length (m)	NPT male thread	ID (in)	Coil Ø (In)	Max length (ft)	Min. length (ft)
<b>PUS 64V</b>	R 1/4	6.5 x 10	42	4	0.4	1/4" MNPT	5/16"	2.05"	13'	1.31'
<b>PUS 264V</b>						1/4" MNPT	5/16"	2.05"	20'	2.07'

Reference	BSPT male thread	ID/OD (mm)	Coil Ø (mm)	Max length (m)	Min. length (m)	NPT male thread	ID (in)	Coil Ø (In)	Max length (ft)	Min. length (ft)
<b>PUS 266V</b>										

