


Polyurethane recoils with rigid and swiveling male fittings

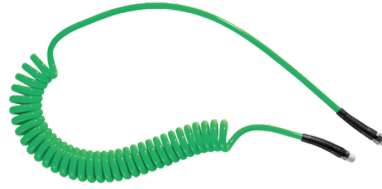

Green.

Teflon-coated coupler.

<u>BSPT male thread</u> R 1/4	<u>ID/OD (mm)</u> 6.5 x 10	<u>Coil Ø (mm)</u> 42	<u>Max length (m)</u> 4
<u>Min. length (m)</u> 0.4	<u>Max operating pressure</u> 8 bar	<u>Temperature</u> -15°C to +70°C	<u>Construction</u> Polyurethane
<u>Highlight</u> Non scratch			

Description										
Reference	BSPT male thread	ID/OD (mm)	Coil Ø (mm)	Max length (m)	Min. length (m)	NPT male thread	ID (in)	Coil Ø (In)	Max length (ft)	Min. length (ft)
PUS 64V	R 1/4	6.5 x 10	42	4	0.4	1/4" MNPT	5/16"	2.05"	13'	1.31'
PUS 264V						1/4" MNPT	5/16"	2.05"	20'	2.07'

Reference	BSPT male thread	ID/OD (mm)	Coil Ø (mm)	Max length (m)	Min. length (m)	NPT male thread	ID (in)	Coil Ø (In)	Max length (ft)	Min. length (ft)
PUS 266V										

