

Balancer: Cable length 6.56'



Length (Cable (ft))

6.56

Min. load (lb)

55.13

Max. load (lb)

66.15

Weight (lb)

24.92

Temperature

+41°F to +140°F

Construction


Body : Aluminum Cable :
Stainless steel

Applications

Mounting Decks,
Assembling, Packaging

Description

Reference	Length (Cable (ft))	Min. load (lb)	Max. load (lb)	Weight (lb)
BAL 250300F	6.56	55.13	66.15	24.92
BAL 300350F	6.56	66.15	77.18	24.92
BAL 350450F	6.56	77.18	99.23	26.92
BAL 450550F	6.56	99.23	121.28	26.92
BAL 550650F	6.56	121.28	143.33	28.8
BAL 650750F	6.56	143.30	165.35	30.56
BAL 750900F	6.56	165.38	198.45	37.13
BAL 9001050F	6.56	198.45	231.53	39.18

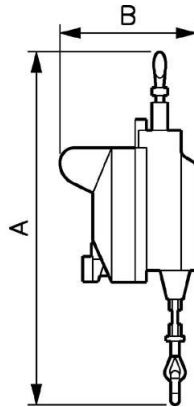

Dimensions

Reference	A inch	B inch
BAL 250300F	2.0866141732283	0.72178477690289
BAL 300350F	2.0866141732283	0.72178477690289
BAL 350450F	2.0866141732283	0.72178477690289
BAL 450550F	2.0866141732283	0.72178477690289
BAL 550650F	2.0866141732283	0.72178477690289
BAL 650750F	2.0866141732283	0.72178477690289
BAL 750900F	2.0866141732283	0.72178477690289
BAL 9001050F	2.0866141732283	0.72178477690289