

## Balancer: Cable length 6.56'



**Length (Cable (ft))**

6.56

**Min. load (lb)**

55.13

**Max. load (lb)**

66.15

**Weight (lb)**

24.92

**Temperature**

+41°F to +140°F

**Construction**


Body : Aluminum Cable :  
Stainless steel

**Applications**

Mounting Decks,  
Assembling, Packaging

### Description

Reference	Length (Cable (ft))	Min. load (lb)	Max. load (lb)	Weight (lb)
<b>BAL 250300F</b>	6.56	55.13	66.15	24.92
<b>BAL 300350F</b>	6.56	66.15	77.18	24.92
<b>BAL 350450F</b>	6.56	77.18	99.23	26.92
<b>BAL 450550F</b>	6.56	99.23	121.28	26.92
<b>BAL 550650F</b>	6.56	121.28	143.33	28.8
<b>BAL 650750F</b>	6.56	143.30	165.35	30.56
<b>BAL 750900F</b>	6.56	165.38	198.45	37.13
<b>BAL 9001050F</b>	6.56	198.45	231.53	39.18

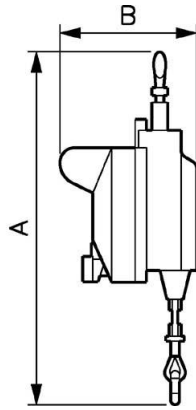

### Dimensions

Reference	A inch	B inch
<b>BAL 250300F</b>	2.0866141732283	0.72178477690289
<b>BAL 300350F</b>	2.0866141732283	0.72178477690289
<b>BAL 350450F</b>	2.0866141732283	0.72178477690289
<b>BAL 450550F</b>	2.0866141732283	0.72178477690289
<b>BAL 550650F</b>	2.0866141732283	0.72178477690289
<b>BAL 650750F</b>	2.0866141732283	0.72178477690289
<b>BAL 750900F</b>	2.0866141732283	0.72178477690289
<b>BAL 9001050F</b>	2.0866141732283	0.72178477690289