


## Balancer: Cable length 6.56'



<b><u>Length (Cable (ft))</u></b> 6.56	<b><u>Min. load (lb)</u></b> 8.82	<b><u>Max. load (lb)</u></b> 15.44	<b><u>Weight (lb)</u></b> 10.89
<b><u>Temperature</u></b> +41°F to +140°F	<b><u>Construction</u></b> Body : Aluminum Cable : Stainless steel	<b><u>Applications</u></b> Mounting Decks, Assembling, Packaging	

Description				
Reference	Length (Cable (ft))	Min. load (lb)	Max. load (lb)	Weight (lb)
<b>BAL 4070DP</b>	6.56	8.82	15.44	10.89
<b>BAL 70100DP</b>	6.56	15.44	22.05	11.69
<b>BAL 100140DP</b>	6.56	22.05	30.87	12.50

Reference	Length (Cable (ft))	Min. load (lb)	Max. load (lb)	Weight (lb)
<b>BAL 140180DP</b>	6.56	30.87	39.69	13.8
<b>BAL 180220DP</b>	6.56	39.69	48.51	12.99
<b>BAL 220250DP</b>	6.56	48.51	55.13	14.40

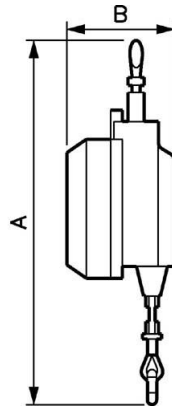

### Dimensions

Reference	A inch	B inch
<b>BAL 4070DP</b>	1.8077427821522	0.45931758530184
<b>BAL 70100DP</b>	1.8077427821522	0.45931758530184
<b>BAL 100140DP</b>	1.8077427821522	0.45931758530184
<b>BAL 140180DP</b>	1.8077427821522	0.45931758530184
<b>BAL 180220DP</b>	1.8077427821522	0.45931758530184
<b>BAL 220250DP</b>	1.8077427821522	0.45931758530184