


Balancer: Cable length 6.56'



<u>Length (Cable (ft))</u> 6.56	<u>Min. load (lb)</u> 8.82	<u>Max. load (lb)</u> 15.44	<u>Weight (lb)</u> 10.89
<u>Temperature</u> +41°F to +140°F	<u>Construction</u> Body : Aluminum Cable : Stainless steel	<u>Applications</u> Mounting Decks, Assembling, Packaging	

Description				
Reference	Length (Cable (ft))	Min. load (lb)	Max. load (lb)	Weight (lb)
BAL 4070DP	6.56	8.82	15.44	10.89
BAL 70100DP	6.56	15.44	22.05	11.69
BAL 100140DP	6.56	22.05	30.87	12.50

Reference	Length (Cable (ft))	Min. load (lb)	Max. load (lb)	Weight (lb)
BAL 140180DP	6.56	30.87	39.69	13.8
BAL 180220DP	6.56	39.69	48.51	12.99
BAL 220250DP	6.56	48.51	55.13	14.40

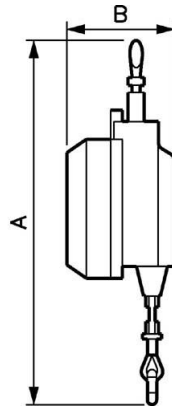

Dimensions

Reference	A inch	B inch
BAL 4070DP	1.8077427821522	0.45931758530184
BAL 70100DP	1.8077427821522	0.45931758530184
BAL 100140DP	1.8077427821522	0.45931758530184
BAL 140180DP	1.8077427821522	0.45931758530184
BAL 180220DP	1.8077427821522	0.45931758530184
BAL 220250DP	1.8077427821522	0.45931758530184