

## Parts for Programmable Electronic Drain







<b>Description</b> (2) Coil	<b>Fastening NPT male thread</b> 110V-50/60 Hz	<b>Operating pressure</b> 0 to 232 psi	<b>ID Passage</b> 5/32"
<b>Temperature</b> +35°F to +131°F	<b>Drain cycle</b> 0,5 - 45 min	<b>Drain opening</b> 0,5 - 10 sec	<b>Supply voltage</b> 24 - 220 V 50/60 HZ

Description		
Reference	Description	Fastening NPT male thread
<b>BOB 110VA</b>	(2) Coil	110V-50/60 Hz
<b>ELV 201</b>	(3) Solenoid	1/4" FNPT
<b>ELV 202</b>	(3) Solenoid	3/8" FNPT
<b>ELV 203</b>	(3) Solenoid	1/2" FNPT

Reference	Description	Fastening NPT male thread
<b>COL 253252</b>	(4) Impurity collector	1/2" MNPT x 3/8" MNPT
<b>TEMP CONNECT</b>	(5) Power connector	



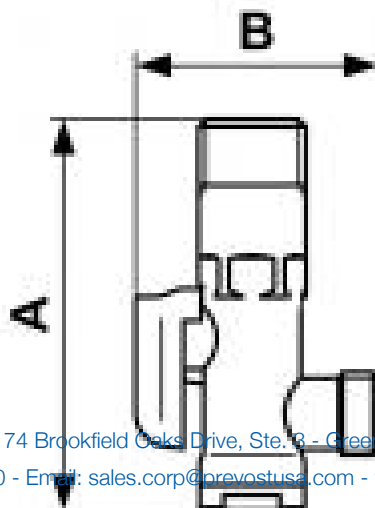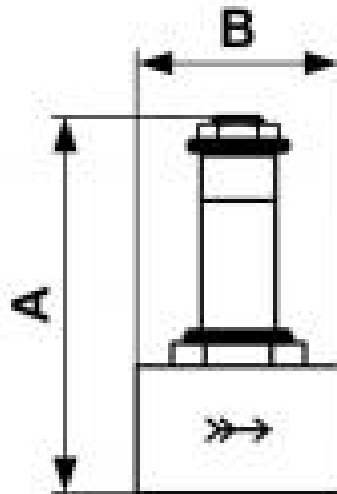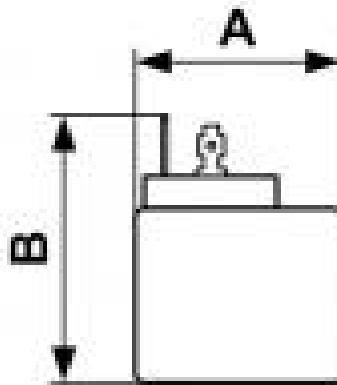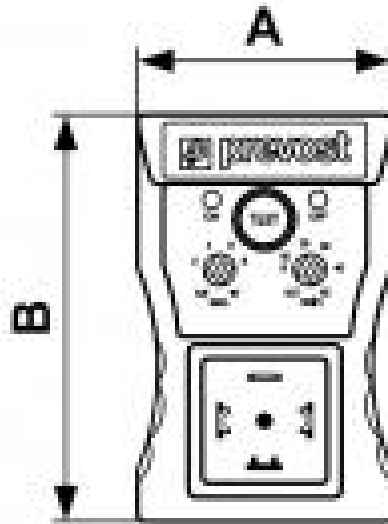

Dimensions		
Reference	A inch	B inch
<b>BOB 110VA</b>	0.13451443569554	0.1738845144357
<b>ELV 201</b>	3.15	1.575
<b>ELV 202</b>	3.15	1.575
<b>ELV 203</b>	3.15	1.811
<b>COL 253252</b>	0.32152230971129	0.19685039370079
<b>TEMP CONNECT</b>	1.772	0.984