

ALTO 3 - Regulator with gauge



BSPP female thread

G 1/2

Flow rate (l/min at 7 bar ΔP)

1bar) = 4000

Operating pressure (bar)

Inlet: 15 Outlet: 0.5-10

Temperature

+5°C to +50 °C

Construction

Body : Aluminium


Polycarbonate bowl with
metallic protection

Equipped with

Manual drain

Description

Reference	BSPP female thread	Flow rate (l/min at 7 bar ΔP)	Operating pressure (bar)
TR M3	G 1/2	1bar) = 4000	Inlet: 15 Outlet: 0.5-10

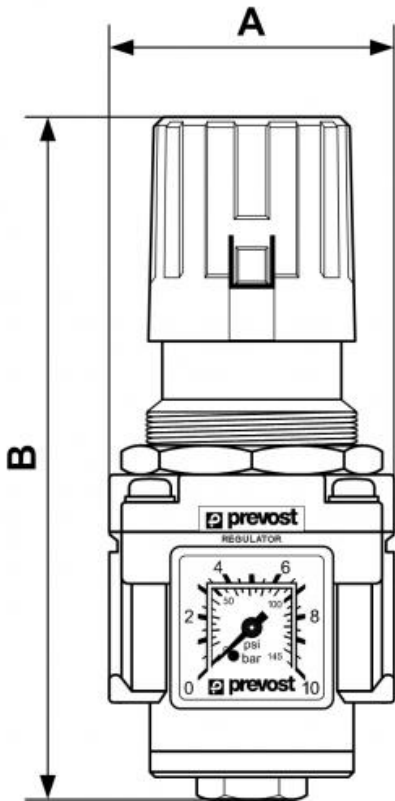

Dimensions		
Reference	A inch	B inch
TR M3	70	165