


## Female coupler



<p><b><u>NPT female thread</u></b> 1/4" FNPT</p>	<p><b><u>Profile</u></b> Asian</p>	<p><b><u>Technology</u></b> Safety (avoid hose whip)</p>	<p><b><u>Operating pressure</u></b> 29 to 174 psi</p>
<p><b><u>ID Passage</u></b> 3/8" body size</p>	<p><b><u>Temperature</u></b> +5°F to +158°F</p>	<p><b><u>Construction</u></b> Composite body</p>	<p><b><u>Highlight</u></b> Non scratch</p>

Description			
Reference	NPT female thread	BSPP female thread	BSPT female thread
<b>OSG 081201V</b>	1/4" FNPT	1/4" FBSP	-
<b>OSG 081101</b>		3/8" FBSP	-
<b>OSG 081102</b>		1/2" FBSP	-
<b>OSG 081103</b>		-	R 1/4
<b>OSG 081111</b>		-	R 3/8
<b>OSG 081112</b>		-	R 1/2

Reference	NPT female thread	BSPP female thread	BSPT female thread
<b>OSG 081113</b>			

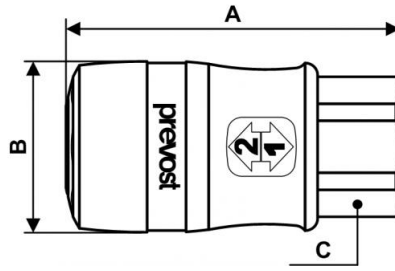

### Dimensions

Reference	A inch	B inch	C inch
<b>OSG 081201V</b>	0.17716535433071	0.10826771653543	0.088582677165354
<b>OSG 081101</b>	0.17716535433071	0.10826771653543	0.088582677165354
<b>OSG 081102</b>	0.18044619422572	0.10826771653543	0.088582677165354
<b>OSG 081103</b>	0.19685039370079	0.10826771653543	0.088582677165354
<b>OSG 081111</b>	0.17716535433071	0.10826771653543	0.088582677165354
<b>OSG 081112</b>	0.18044619422572	0.10826771653543	0.088582677165354
<b>OSG 081113</b>	0.19685039370079	0.10826771653543	0.088582677165354