


Female coupler



<p><u>NPT female thread</u> 1/4" FNPT</p>	<p><u>Profile</u> Asian</p>	<p><u>Technology</u> Safety (avoid hose whip)</p>	<p><u>Operating pressure</u> 29 to 174 psi</p>
<p><u>ID Passage</u> 3/8" body size</p>	<p><u>Temperature</u> +5°F to +158°F</p>	<p><u>Construction</u> Composite body</p>	<p><u>Highlight</u> Non scratch</p>

Description			
Reference	NPT female thread	BSPP female thread	BSPT female thread
OSG 081201V	1/4" FNPT	1/4" FBSP	-
OSG 081101		3/8" FBSP	-
OSG 081102		1/2" FBSP	-
OSG 081103		-	R 1/4
OSG 081111		-	R 3/8
OSG 081112		-	R 1/2

Reference	NPT female thread	BSPP female thread	BSPT female thread
OSG 081113			

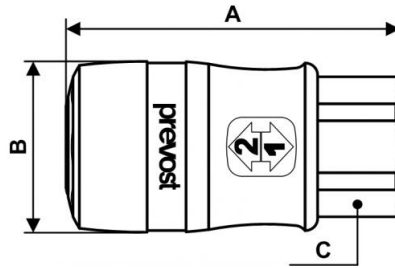

Dimensions

Reference	A inch	B inch	C inch
OSG 081201V	0.17716535433071	0.10826771653543	0.088582677165354
OSG 081101	0.17716535433071	0.10826771653543	0.088582677165354
OSG 081102	0.18044619422572	0.10826771653543	0.088582677165354
OSG 081103	0.19685039370079	0.10826771653543	0.088582677165354
OSG 081111	0.17716535433071	0.10826771653543	0.088582677165354
OSG 081112	0.18044619422572	0.10826771653543	0.088582677165354
OSG 081113	0.19685039370079	0.10826771653543	0.088582677165354