

Open Hose Reel - High pressure stainless steel - Hot Water - HP reinforced rubber hose



ID (in)

5/16"

Length (ft)

50'

Outlet

3/8" MBSP + M22 x 1.5

Swivel inlet BSPP

female thread

3/8" FBSP

Weight (lb)

35.28

Technology

Pipe locked with ratchet stop

Max operating

pressure

5800 psi

Temperature


-40°F to +302°F

Equipped with

Fixed bracket

Description

Reference	ID (in)	Length (ft)	Outlet	Swivel inlet BSPP female thread	Weight (lb)
DMO 0815HPI	5/16"	50'	3/8" MBSP + M22 x 1.5	3/8" FBSP	35.28
DGO 0820HPI	5/16"	65'	3/8" MBSP + M22 x 1.5	3/8" FBSP	46.30

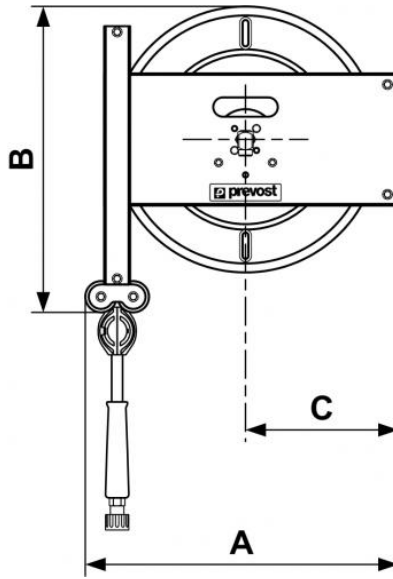

Dimensions

Reference	A inch	B inch	C inch
DMO 0815HPI	1.5912073490814	1.5583989501312	0.77755905511811
DGO 0820HPI	1.5912073490814	1.5583989501312	0.77755905511811