


Open Hose Reel - High pressure stainless steel - Hot Water - HP reinforced rubber hose



<p><u>ID (in)</u> 5/16"</p>	<p><u>Length (ft)</u> 50'</p>	<p><u>Outlet</u> 3/8" MBSP + M22 x 1.5</p>	<p><u>Swivel inlet BSPP female thread</u> 3/8" FBSP</p>
<p><u>Weight (lb)</u> 35.28</p>	<p><u>Technology</u> Pipe locked with ratchet stop</p>	<p><u>Max operating pressure</u> 5800 psi</p>	<p><u>Temperature</u> -40°F to +302°F</p>
<p><u>Equipped with</u> Fixed bracket</p>			

Description

Reference	ID (in)	Length (ft)	Outlet	Swivel inlet BSPP female thread	Weight (lb)
DMO 0815HPI	5/16"	50'	3/8" MBSP + M22 x 1.5	3/8" FBSP	35.28
DGO 0820HPI	5/16"	65'	3/8" MBSP + M22 x 1.5	3/8" FBSP	46.30

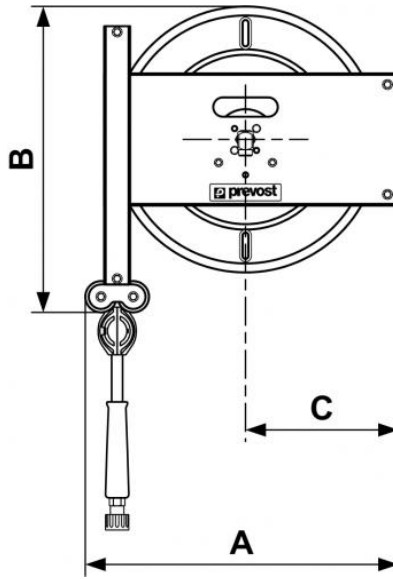

Dimensions

Reference	A inch	B inch	C inch
DMO 0815HPI	1.5912073490814	1.5583989501312	0.77755905511811
DGO 0820HPI	1.5912073490814	1.5583989501312	0.77755905511811