

## Open Hose Reel - Low Pressure Water



**ID (in)**

5/8"

**Length (ft)**

33'

**Coupler**

ELS 09

**Swivel inlet BSPP**

**male thread**

1/2" MBSP

**Weight (lb)**

44.10

**Technology**

Pipe locked with ratchet stop

**Max operating**

**pressure**

145 psi

**Temperature**

+5°F to +140°F

**Construction**

Epoxy-coated steel case

**Connection**


3.3 ft of inlet supply hose

**Equipped with**

Fixed bracket

### Description

| Reference         | ID (in) | Length (ft) | Coupler | Swivel inlet<br>BSPP male<br>thread | Weight (lb) |
|-------------------|---------|-------------|---------|-------------------------------------|-------------|
| <b>DMO 1610LS</b> | 5/8"    | 33'         | ELS 09  | 1/2" MBSP                           | 44.10       |
| <b>DGO 1615LS</b> | 5/8"    | 50'         | ELS 09  | 1/2" MBSP                           | 55.12       |

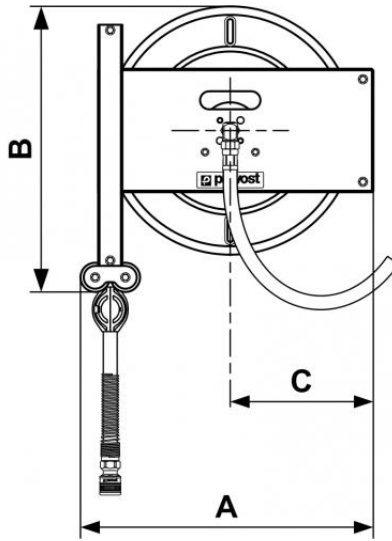

### Dimensions

| Reference         | A inch          | B inch          | C inch           |
|-------------------|-----------------|-----------------|------------------|
| <b>DMO 1610LS</b> | 1.5912073490814 | 1.5583989501312 | 0.77755905511811 |
| <b>DGO 1615LS</b> | 1.5912073490814 | 1.5583989501312 | 0.77755905511811 |