

Complete portable kit for 22/44 lb grease drums



Includes

- pump for 22/44 lb drum -
tube length: 16.1 in - cover
+ sealing diaphragm -
distribution gun - 13 ft
rubber hose - carrying
handle

Flow rate

Technology

Piston dual action

Operating pressure

43 to 100 psi

Outlet pressure

5800 psi (air pressure at 100
psi)

300 z/min (for air pressure
87 psi)

BSPP female thread

Air inlet : 1/4" FBSP

Pressure ratio


58:1

BSPP male thread

Grease outlet: G 1/4

Description

| Reference | Includes |
|-------------------|--|
| EPG KR20 | - pump for 22/44 lb drum - tube length: 16.1 in - cover + sealing diaphragm - distribution gun - 13 ft rubber hose - carrying handle |
| EPG KRF20 | Complete portable kit for 22/44 lb grease drums with FRL |
| EPG KRFC20 | Complete portable kit for 22/44 lb grease drums with FRL and transport cart |

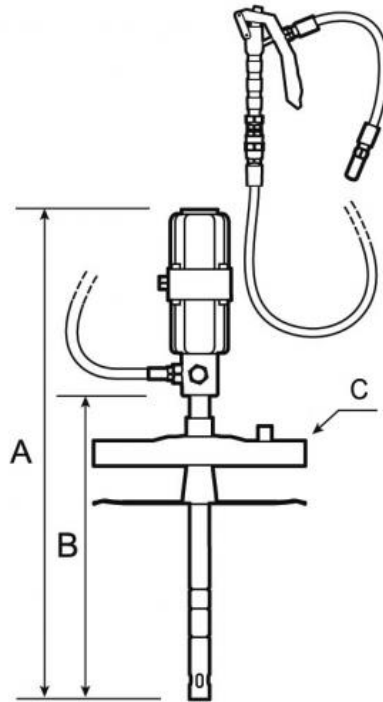

Dimensions

| Reference | A inch | B inch | C inch |
|-------------------|-----------------|-----------------|------------------|
| EPG KR20 | 2.2309711286089 | 1.3451443569554 | 0.91863517060368 |
| EPG KRF20 | 2.2309711286089 | 1.3451443569554 | 0.91863517060368 |
| EPG KRFC20 | 2.2309711286089 | 1.3451443569554 | 0.91863517060368 |