

Complete portable kit for 22/44 lb grease drums



Includes

- pump for 22/44 lb drum -
tube length: 16.1 in - cover
+ sealing diaphragm -
distribution gun - 13 ft
rubber hose - carrying
handle

Technology

Piston dual action

Operating pressure

43 to 100 psi

Outlet pressure

5800 psi (air pressure at 100
psi)

Flow rate

300 z/min (for air pressure
87 psi)

BSPP female thread

Air inlet : 1/4" FBSP

Pressure ratio

58:1

BSPP male thread

Grease outlet: G 1/4

Description

Reference

Includes

EPG KR20


- pump for 22/44 lb drum - tube length: 16.1 in - cover +
sealing diaphragm - distribution gun - 13 ft rubber hose -
carrying handle

EPG KRF20

Complete portable kit for 22/44 lb grease drums with FRL

EPG KRFC20

Complete portable kit for 22/44 lb grease drums with FRL and
transport cart

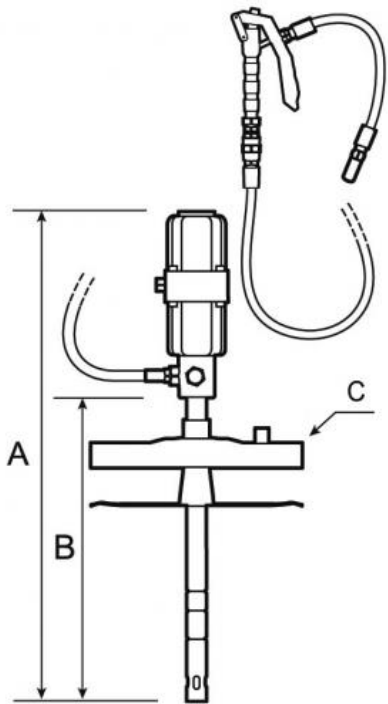

Dimensions			
Reference	A inch	B inch	C inch
EPG KR20	2.2309711286089	1.3451443569554	0.91863517060368
EPG KRF20	2.2309711286089	1.3451443569554	0.91863517060368
EPG KRFC20	2.2309711286089	1.3451443569554	0.91863517060368