

Complete portable kit for 44/66 lb grease drums



Includes

- pump for 44/66 lb drum -
tube length: 18.5 in - cover
+ sealing diaphragm -
distribution gun - 20 ft
rubber hose

Technology

Piston dual action

Operating pressure

43 to 100 psi

Outlet pressure

5800 psi (air pressure at 100
psi)

Flow rate

300 z/min (for air pressure
87 psi)

BSPP female thread

Air inlet : 1/4" FBSP

Pressure ratio


58:1

BSPP male thread

Grease outlet: G 1/4

Description

| Reference | Includes |
|-------------------|--|
| EPG KR30 | - pump for 44/66 lb drum - tube length: 18.5 in - cover + sealing diaphragm - distribution gun - 20 ft rubber hose |
| EPG KRF30 | Complete portable kit for 44/60 lb grease drums with FRL |
| EPG KRFC30 | Complete kit for 44/60 lb grease drums with FRL and transport cartt |

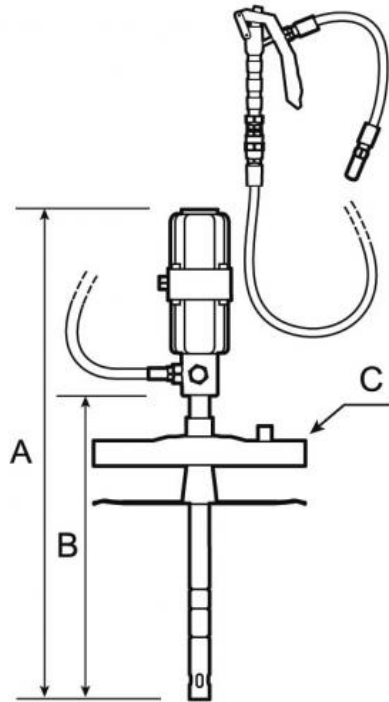

Dimensions

| Reference | A inch | B inch | C inch |
|-------------------|-----------------|-----------------|-----------------|
| EPG KR30 | 2.4278215223097 | 1.5419947506562 | 1.0498687664042 |
| EPG KRF30 | 2.4278215223097 | 1.5419947506562 | 1.0498687664042 |
| EPG KRFC30 | 2.4278215223097 | 1.5419947506562 | 1.0498687664042 |