

## Complete portable kit for 44/66 lb grease drums



### Includes

- pump for 44/66 lb drum -  
tube length: 18.5 in - cover  
+ sealing diaphragm -  
distribution gun - 20 ft  
rubber hose

### Technology

Piston dual action

### Operating pressure

43 to 100 psi

### Outlet pressure

5800 psi (air pressure at 100  
psi)

### Flow rate

300 z/min (for air pressure  
87 psi)

### BSPP female thread

Air inlet : 1/4" FBSP

### Pressure ratio


58:1

### BSPP male thread

Grease outlet: G 1/4

## Description

Reference	Includes
<b>EPG KR30</b>	- pump for 44/66 lb drum - tube length: 18.5 in - cover + sealing diaphragm - distribution gun - 20 ft rubber hose
<b>EPG KRF30</b>	Complete portable kit for 44/60 lb grease drums with FRL
<b>EPG KRFC30</b>	Complete kit for 44/60 lb grease drums with FRL and transport cartt

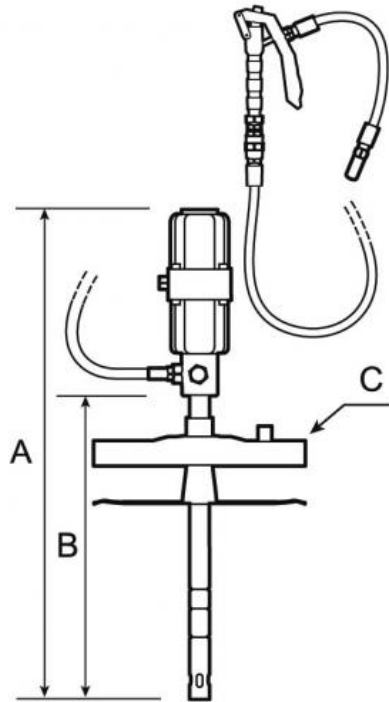

### Dimensions

Reference	A inch	B inch	C inch
<b>EPG KR30</b>	2.4278215223097	1.5419947506562	1.0498687664042
<b>EPG KRF30</b>	2.4278215223097	1.5419947506562	1.0498687664042
<b>EPG KRFC30</b>	2.4278215223097	1.5419947506562	1.0498687664042