


## Red - Coil hose with fixed and swivel male fittings

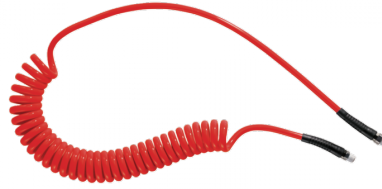

Red.

Teflon-coated coupler.

|  |   |   |  |
|--|---|---|--|
| <b><u>NPT male thread</u></b><br>1/4" MNPT | <b><u>ID (in)</u></b><br>5/16"                  | <b><u>Coil Ø (In)</u></b><br>2.05"          | <b><u>Max length (ft)</u></b><br>13'       |
| <b><u>Min. length (ft)</u></b><br>1.31     | <b><u>Max operating pressure</u></b><br>116 psi | <b><u>Temperature</u></b><br>+5°F to +158°F | <b><u>Construction</u></b><br>Polyurethane |
| <b><u>Highlight</u></b><br>Non scratch     |   |   |  |

| Description     |                 |         |             |                 |                  |
|-----------------|-----------------|---------|-------------|-----------------|------------------|
| Reference       | NPT male thread | ID (in) | Coil Ø (In) | Max length (ft) | Min. length (ft) |
| <b>PUS 264R</b> | 1/4" MNPT       | 5/16"   | 2.05"       | 13'             | 1.31             |
| <b>PUS 266R</b> | 1/4" MNPT       | 5/16"   | 2.05"       | 20'             | 2.07'            |

