

## Male coupler



**NPT male thread**

1/4" MNPT

**Technology**

"One push" safety system  
(avoids hose whip)

**Operating pressure**

29 to 174 psi

**Flow rate at 100 psi**

34 cfm ( $\Delta P = 10$  psi)

**ID Passage**

1/4" body size

**Temperature**

+5°F to +158°F

**Construction**


Composite body

**Highlight**

Anti-static Non scratch

### Description

Reference	NPT male thread
<b>USI 061251</b>	1/4" MNPT
<b>USI 061252</b>	3/8" MNPT
<b>USI 061253</b>	1/2" MNPT

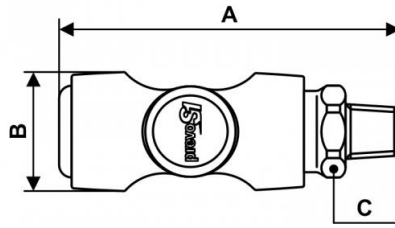

### Dimensions

Reference	A inch	B inch	C inch
<b>USI 061251</b>	0.26902887139108	0.098425196850394	0.065616797900262
<b>USI 061252</b>	0.26902887139108	0.098425196850394	0.065616797900262
<b>USI 061253</b>	0.28871391076115	0.098425196850394	0.075459317585302