


threaded swivel coupler



<p><u>NPT female thread</u> 3/8" FNPT</p>	<p><u>Technology</u> "One push" safety system (avoids hose whip)</p>	<p><u>Operating pressure</u> 29 to 174 psi</p>	<p><u>Flow rate at 100 psi</u> 81 cfm ($\Delta P = 10$ psi)</p>
<p><u>ID Passage</u> 3/8" body size</p>	<p><u>Temperature</u> +5°F to +158°F</p>	<p><u>Construction</u> Composite body</p>	<p><u>Highlight</u> Anti-static Non scratch</p>

Description	
Reference	NPT female thread
USI 081202SW	3/8" FNPT

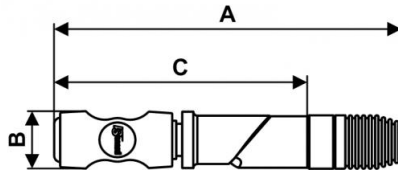

Dimensions

Reference	A inch	B inch	C inch
USI 081202SW	0.60367454068241	0.10826771653543	0.45669291338583