

## Female coupler



**NPT female thread**

3/8" FNPT

**Profile**

Automotive Interchange

**Technology**

"One push" safety system  
(avoids hose whip)

**Operating pressure**

29 to 232 psi

**Flow rate at 100 psi**

120 cfm ( $\Delta P = 10$  psi)

**ID Passage**

1/2" body size

**Temperature**

+5°F to +158°F

**Construction**


Stainless steel

**Highlight**

Anti-static Excellent  
efficiency Harsh conditions

### Description

Reference	NPT female thread
<b>USI 111202</b>	3/8" FNPT
<b>USI 111203</b>	1/2" FNPT
<b>USI 111204</b>	3/4" FNPT

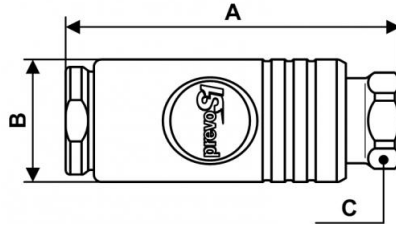

### Dimensions

Reference	A inch	B inch	C inch
<b>USI 111202</b>	0.32644356955381	0.12139107611549	0.085301837270341
<b>USI 111203</b>	0.33464566929134	0.12139107611549	0.085301837270341
<b>USI 111204</b>	0.35433070866142	0.12139107611549	0.098425196850394